


DUAL Relay on Board

Technical Datasheet

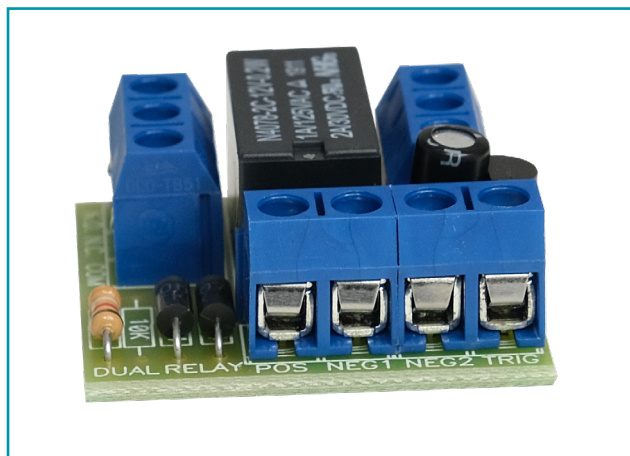

Wiring Diagram

- +12v DC or 16v AC
- -12v DC or 16v AC
- -12vDC if low voltage trigger is used
- low voltage + trigger

Application:

- To switch high voltage/current device from a low voltage.
- Perform dual task from single trigger.

Specifications:

- 12v DC or 16v AC operation.
- Dual normally open and closed potential free relay contacts.
- Low current 20mA when energised.
- Current rating 1A@ 30v DC.
- 1v transistor trigger option, 12v DC supply only.
- Reverse polarity protection.
- Physical size: 32mm x 32mm.

Installation

- Connect trigger voltage and load.
- POS and NEG used for normal voltage trigger.
- POS, NEG2 and TRIG used with low voltage trigger.
- Relay will energise when voltage is applied to trigger.

www.comtronix.net

Tel: 011 791 1362/060 384 1775 / **Email:** support@comtronix.net

While every precaution has been taken during the preparation of this document to ensure the accuracy of its content, Comtronix assumes no responsibility for errors or omissions. Comtronix reserves the right to make changes to the product or this document without notice.