


2A battery charger PCB

Technical Datasheet

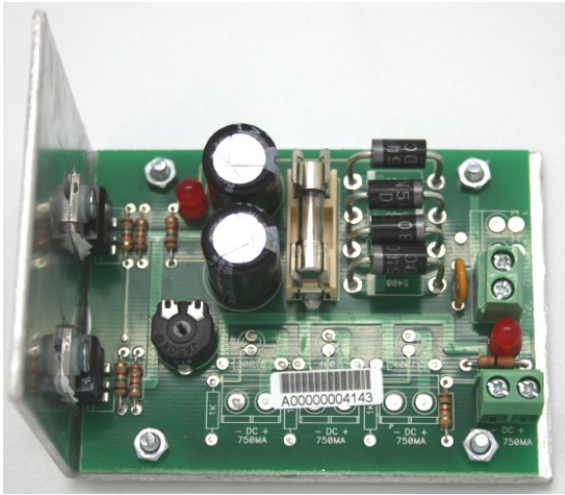

Wiring Diagram:

16v AC input
16v AC input
-13.8v + DC output

Application:

- Trickle charge 7a/h or 17a/h lead acid battery.

Specifications:

- 16v AC input.
- 13.8v DC output.
- Automatically charges 7a/h or 17a/h battery.
- Overcurrent protection.
- Aluminium heat sink.
- Physical size: 100mm x 64mm.

Installation

- Connect 16v AC.
- Connect 13.8v DC.
- RED LED's indicate voltage is present.

www.comtronix.net

Tel: 011 791 1362/060 384 1775 / **Email:** support@comtronix.net

While every precaution has been taken during the preparation of this document to ensure the accuracy of its content, Comtronix assumes no responsibility for errors or omissions. Comtronix reserves the right to make changes to the product or this document without notice.