


Low Battery Cut out - Plug on

Technical Datasheet

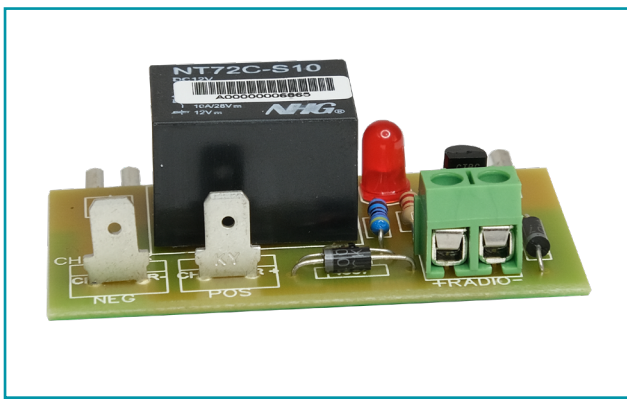

Application:

- To prevent the total discharge of a battery, in any alarm or access control installation.

Specifications:

- Supplied with lugs to plug directly onto Battery.
- 5mm PCB connectors for charger wiring.
- Automatically cuts power when battery voltage falls to 10.5 volts, thereby preventing battery from discharging completely.
- Automatically restores power to battery when charger voltage is re-applied.
- LED indication of low battery status, on when battery ok.
- Current rating 10A@ 12 VDC.
- Physical size: 57mm x 36mm.

Installation

- Connect battery charger wiring onto unit, observe polarity.
- LED and relay energise.
- Connect unit to battery and radio.

www.comtronix.net

Tel: 011 791 1362/060 384 1775 / **Email:** support@comtronix.net

While every precaution has been taken during the preparation of this document to ensure the accuracy of its content, Comtronix assumes no responsibility for errors or omissions. Comtronix reserves the right to make changes to the product or this document without notice.