


Turbo Timer

Technical Datasheet

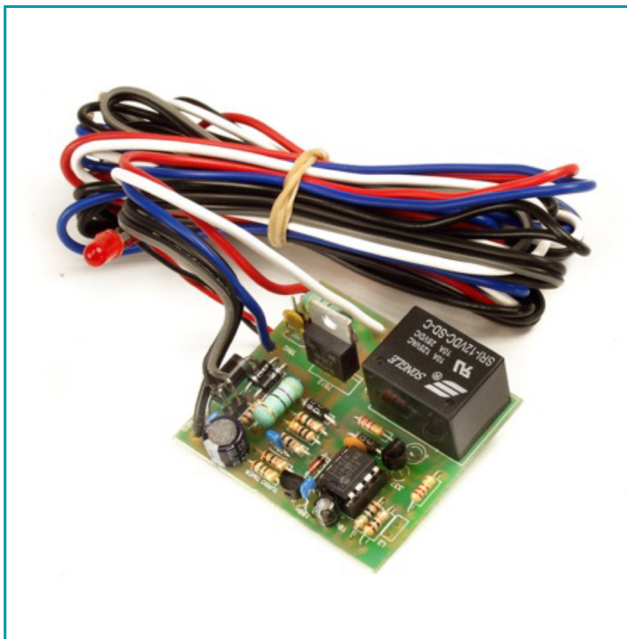

Wiring:

Connect power and relay output as per wiring diagram.

Application:

- To automatically power equipment for a preset time after power down.

Specifications:

- 12v or 24v DC operation.
- 12v or 24v DC switched output.
- Low standby current 5.6mA.
- Current rating 10A@ 12 or 24 VDC.
- Reset switch included.
- Supplied in plastic enclosure filled with waterproof resin.
- Physical size: 75mm x 49mm x 40mm.

Installation

- Connect read and black power wires.
- Connect ignition to blue wire.
- Connect load to white wire.
- Red LED and relay turn on when ignition is on and remain on for delayed time after the ignition is turned off.

www.comtronix.net

Tel: 011 791 1362/060 384 1775 / **Email:** support@comtronix.net

While every precaution has been taken during the preparation of this document to ensure the accuracy of its content, Comtronix assumes no responsibility for errors or omissions. Comtronix reserves the right to make changes to the product or this document without notice.